4200 SERIES CAP STYLE - WHEEL RATCHET

Cap Style Industrial Hard Hat

TECHNICAL SPECIFICATION

HEAD PROTECTION

INSTRUCTIONS FOR USE

- Fit hard hat on head and fasten strap to ensure fit
- For adequate protection this hard hat must be worn with the adjustment system at the rear of the head
- Ensure the hard hat is adjusted to the size of the user's head
- Suspension can be removed and replaced for reverse donning

SHELL:
UV Stabilised High Density Polyethylene (HDPE)



WEBBING SUSPENSION:
HDPE Strap & Webbing Clips with Polyester Webbing Straps



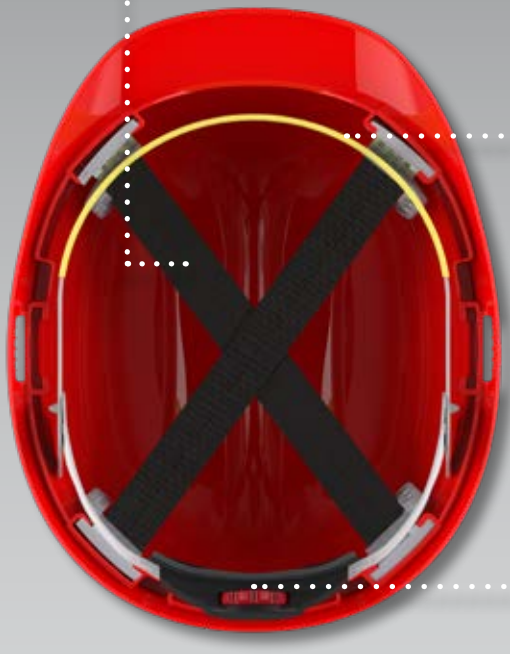

CHAMLON™ SWEATBAND:
Egyptian cotton core with porous PU coating for maximum sweat absorption. pH neutral, dermatologically tested



WHEEL RATCHET:
Intuitave thumb and fore finger press points for easy adjustments of the wheel ratchet, offer diverse size ranges for true one size fits

RIGHTS RESERVED • JSP • DESIGN REGISTERED

CLEANING & MAINTENANCE

- The shell may be cleaned with soap and warm water and dried with a soft cloth
- The hard hat should not be cleaned with chemical or abrasive cleaners
- The hard hat should be stored out of direct sunlight
- The hard hat should be stored away from chemicals and extremes of temperature

CONFORMITY

- Conforms to ANSI/ISEA Z89.1-2009 Type I Class E
- Conforms to CSA Z94.1 Type I Class E
- Meets optional Class E Electrical Insulation requirements
- Suspension can be removed and refitted for reverse wearing
- Company personalisation available by printing

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jspsafety.com.

4200 SERIES CAP STYLE - WHEEL RATCHET

Cap Style Industrial Hard Hat

TECHNICAL SPECIFICATION

HEAD PROTECTION



DIMENSIONS OF OUTER PACKAGING

Quantity: 10

Weight: 8.4lbs (Approx.)

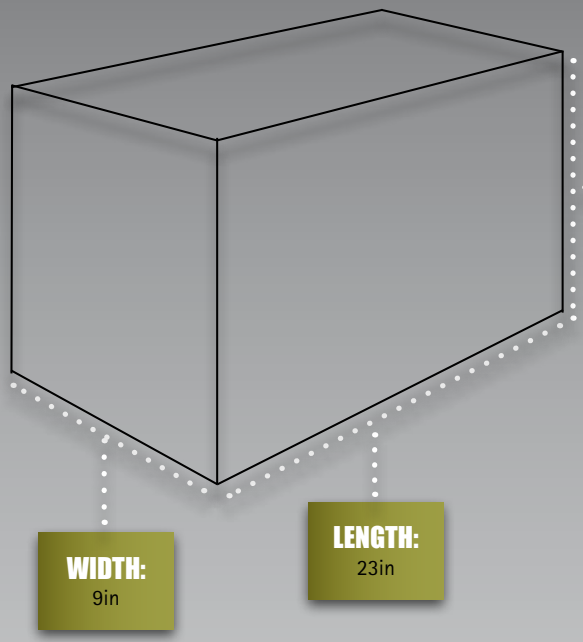

HARD HAT FEATURES

STANDARDS	ANSI/ISEA Z89.1 - 2009, Type I Class E CSA Z94.1 Type I Class E	Yes Yes
PERFORMANCE	Reverse Donning Impact Resistance Electrial Insulation	Yes Yes 54 Joules Yes: Class E 20,000 Volts
SHELL MATERIAL	HDPE Recyclable UV Stabilised	Yes Yes Yes
SUSPENSION MATERIAL	HDPE Textile	Yes Yes
OPTIONS	Universal Accesories	Yes
SUSPENSION SYSTEM OPTIONS	JSP 3D Wheel Ratchet 4 pts	Yes Yes Yes
LOGO OPTIONS	Front Side Back	Yes Yes Yes

DIMENSIONS OF HARD HAT

Size: 20-25 in

Weight: 13.4 oz (Approx.)

LOGO
ADD YOUR LOGO TO OUR PRODUCTS

RIGHTS RESERVED · JSP · DESIGN REGISTERED

LIMITATIONS OF USE

Protection will only be offered if the hard hat is fitted correctly

Any hard hat subjected to severe impact should be replaced immediately. Do not apply paint, solvents or adhesive labels except in accordance with instructions from the manufacturer

The suspension, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the helmet and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

HARD HAT COLOURS AVAILABLE

White, Yellow, Green, Blue, Red and Bright Orange



01 White | 02 Yellow | 03 Green | 05 Blue | 06 Red | S1 Bright Orange

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jspsafety.com.