


UT-855

LANYARDS, TWIN LEGGED ENERGY ABSORBING LANYARD

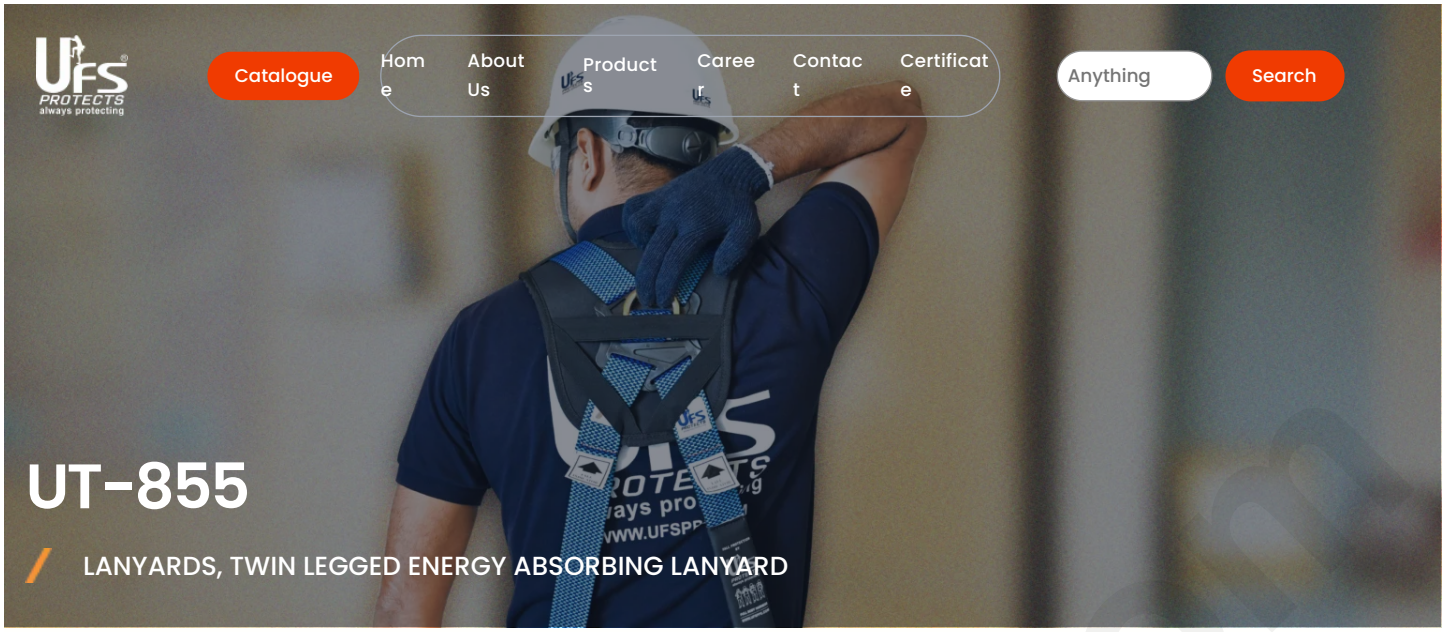

UT-855
TWIN LEGGED ENERGY ABSORBING LANYARD

LANYARDS

Features

- UFS Forked Restraint Lanyards comes in Twisted Rope 12mm, Kernmantle Rope 12mm & also available in 44mm & 32mm wide polyester webbing there by offering the facility to move in all directions while remaining safely anchored at all times.
- The lanyards are suited only for purpose of restraint, and should not be used for Fall Protection since they do not have any Energy Absorber.
- Twin legged Energy Absorbing Lanyard Consisting of A 12mm.
- The Lanyard terminates at one end with a Steel carabiner and steel scaffold Hooks at the Other ends.
- Models are available in sizes of 1m, 1.5m, 1.8m & 2 meters.

Certification

Conforms to : EN 355:2002

CE

TECHNICAL SNAPSHOT

Part code	Webbing Rope	Dia/Width	Attachment Type	Max. Length	Certified to
UT-855	Polyamide Kernmantle Rope	12mm	The Lanyard terminates at one end with a steel carabiner and steel scaffold hooks at the other ends	2.0m	EN 355:2002

pdfcrowd.com

Created by PDFCrowd

For more Query Contact Us

Contact Us

About us

Safety is Our Mission

ufsprotects.co.uk

We at UFS Protects UK Ltd. would like to introduce ourselves as a trusted company in the industry.

Search

Something...

INFORMATION

Home
About Us
Certificate
Contact

COMPANY

Meet Our Team
Career
Catalogue

Unit 5 Rossington Business Park West Carr Road, Retford, Nottinghamshire, United kingdom
7th floor, Office (707) City Avenue Building Next to Deira City Centre, Port Saeed, Deira, Dubai

+971-503016744

varun@ufsprotects.com

salesint@ufsprotects.com

pdfcrowd.com

Created by PDFCrowd